




Coupling-Decoupling Network

C D N L-801 M 2-10 kHz

IEC 61000-4-6

Additionally for Bridge and Deck mounted equipment only IEC 945

AE Port	4mm Banana
EUT Port	4mm Banana
Leads	L+N or L1+L2
Mains	240 V
Max. Current	16 A DC / AC to 400 Hz
IN Port	BNC 50 Ohm
Frequency range	0,15 ... 80 MHz
HF Power Dissipation	4 Watt

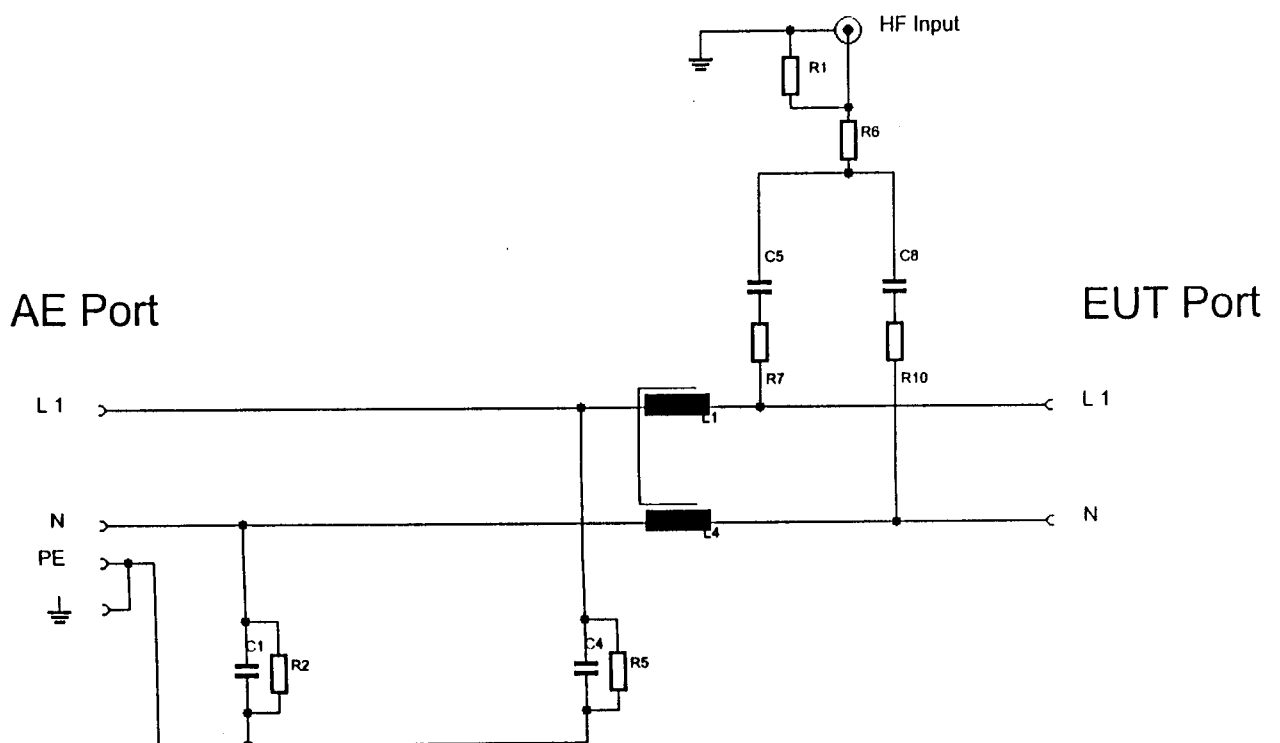

SCHWARZBECK MESS - ELEKTRONIK

Tel.: +49(0)6228/1001 www.schwarzbeck.de office@schwarzbeck.de

L 801 M2 10 kHz



CDN, Netz 2 Leiter, 4 mm Laborbuchsen



CDN Mains 2 leads, 4 mm female connectors

**CDN Impedance and K-factor
in the frequency range 10 kHz - 100 MHz
in a test setup according to IEC 61000-4-6**



Lüthi Elektronik-Feinmechanik AG
CH 4402 Frenkendorf

CDN

L-801 M2 10kHz

Ser. Nr.:

2094

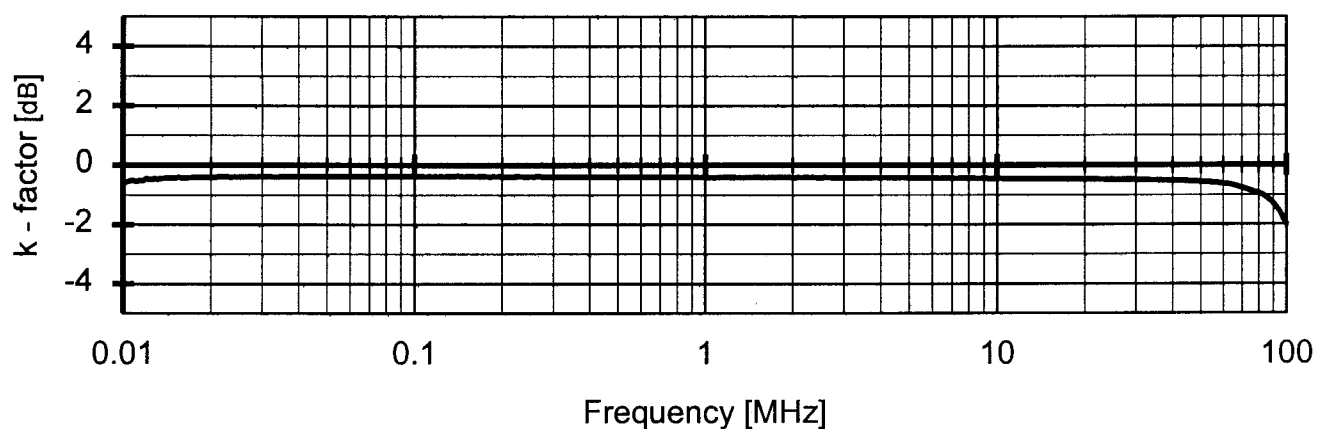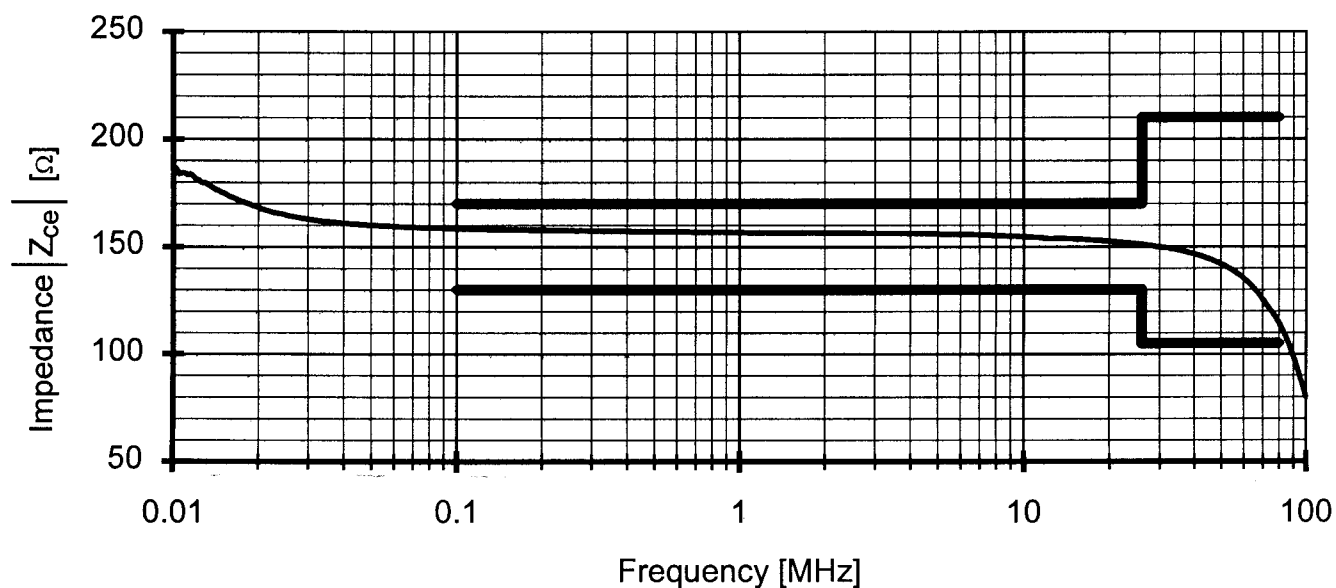

Equipment used:

Network Analyzer Typ ZVR
50 Ω to 150 Ω Adaptor
50 Ω to 150 Ω Adaptor

Inv. Nr. 4110
Inv. Nr. 4159
Inv. Nr. 4160

Location:

Measurement Impedance
Reference for K-factor

EB15

Date and time:
2004.10.21 09:17
2004.10.21 09:13